

OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER

SECTION 5 TOWNSHIP 16 RANGE 4

DATE: 8-1-04

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison


METHOD OF ESTABLISHMENT: County: 10-10-97

IN. S.P.C. E ZONE NAD '83


NAME: 16040504

N: 512334.9310(m)

E: 61022.3320(m)

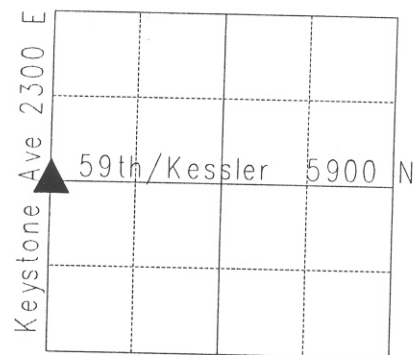

Wash. BM W-35
Elev. 750.38'
MAR. G-55

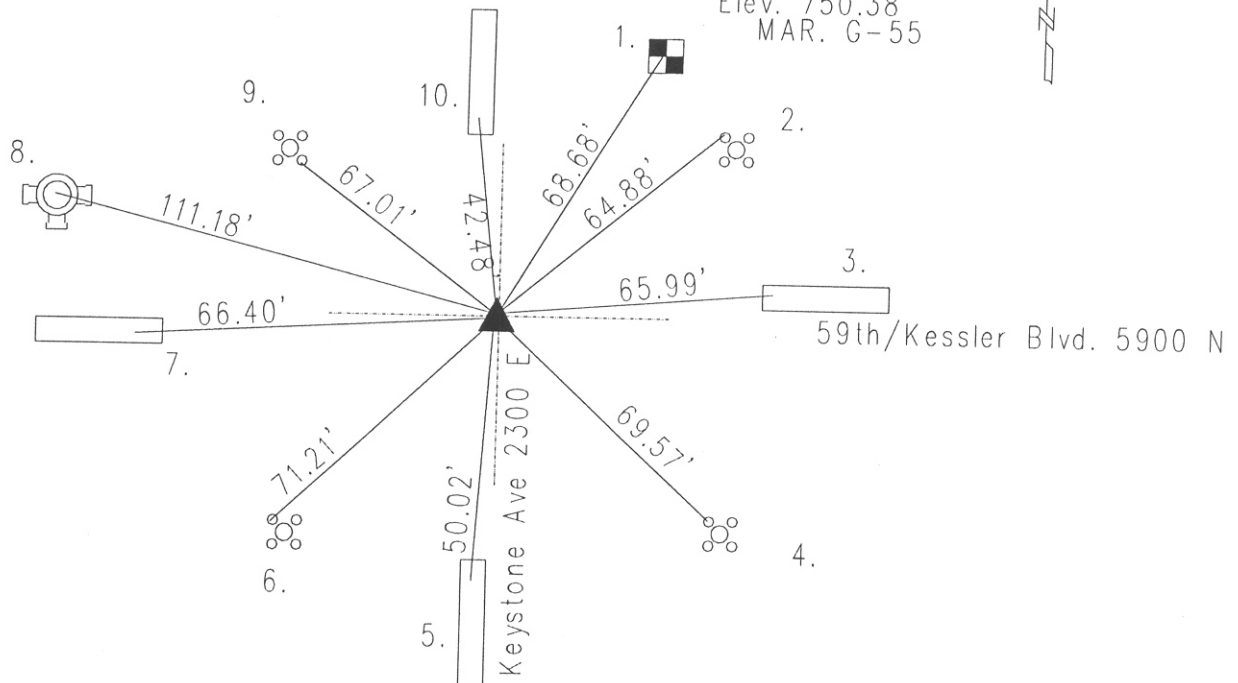

Original post set 1820 by Hendricks with witness: 8" hickory S 62 E 15 links;
10" white oak N 53 W 31 links per Marion County Atlas pg. 11. Julian 3-23-1892
called no stone nor witness per Washington Township Legal Survey Book pg. 37.
MCSO 6-12-47 called 2" galvanized washer. Monroe 4-3-56 called 8" round plate.
Monroe 5-1-58 called pipe. Hankins 2-25-59 called brass plug. McLand 4-17-71
called brass plug. Wilcoxon 11-21-75 called same. Miller 4-17-76 called same.
Wilcoxon excavated corner 3-10-92 set Harrison. Re-tied 10-10-97 by Wilcoxon.
Re-tied 8-1-04 by Wilcoxon. 16040504

REF.	DISTANCE	DESCRIPTION
1.	68.68'	Center of BM disc
2.	64.88'	Cut 'x' NW bolt of aluminum pole base
3.	65.99'	Cut 'x' in median
4.	69.57'	Cut 'x' NW bolt of aluminum pole base
5.	50.02'	Cut 'x' in median
6.	71.21'	Cut 'x' NW bolt of aluminum pole base
7.	66.40'	Cut 'x' in median
8.	111.18'	Top nut of fire hydrant
9.	67.01'	Cut 'x' SE bolt of aluminum pole base
10.	42.48'	Cut 'x' in median